

BIRCH TELESCOPIC MEDIUM SPEC SHEET

BIR-TEL-M





Our BIRCH series LED light fixtures are a simple, yet elegant solution for architectural luminaire. The BIRCH series have three mounting options (Pendant, Wall Mount and Ceiling Mount) and three optic configurations (Narrow, Medium & Wide). Three sizes are available depending on the amount of power needed; Small 5W, Medium 10W and Large 15W. Colour and length of fixture can be customize according to client's specific need.

SPECIFICATION




OPERATING VOLTAGE	100 - 264 VAC
OPERATING TEMPERATURE	-20°C to + 50°C
CRI	80
INPUT CURRENT @115 VAC, 60Hz	90 mA
INPUT CURRENT @230 VAC, 50Hz	55 mA
NO OF LED	1
LED TYPE	COB
LIGHT SOURCE	Cree
CCT	2200K / 2700K / 3000K / 4000K
PROJECTION	Narrow, Medium, Wide
FIXTURE CONNECTION	Junction Box
AVAILABLE IP RATING	IP20

DELIVERED LUMENS BY CCT

White	Single (10W)
2200K	750 lm
2700K	900 lm
3000K	940 lm
4000K	990 lm



Application

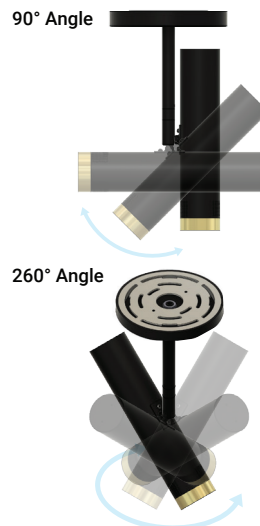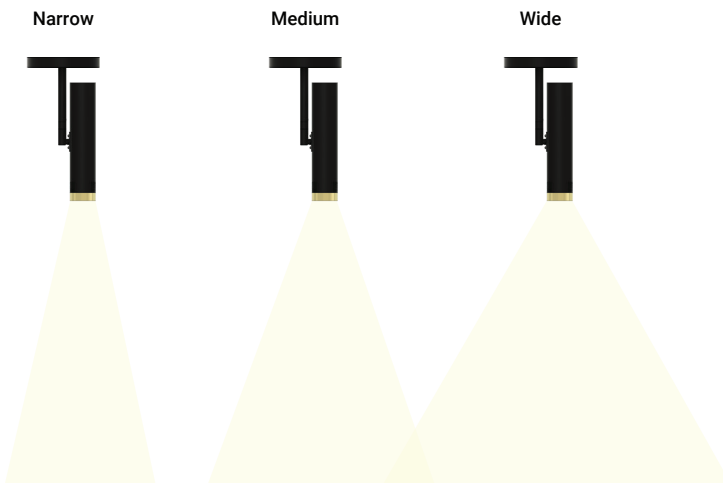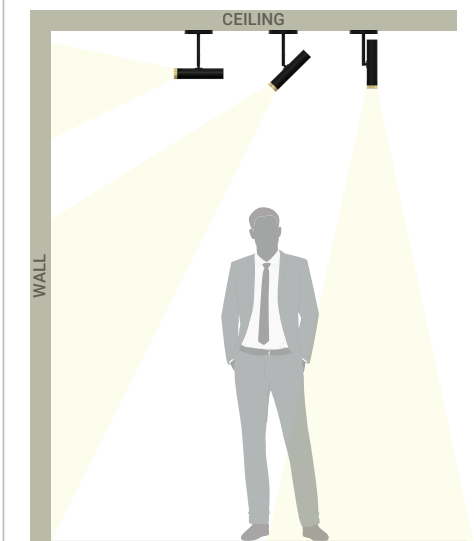

BIRCH TELESCOPIC MEDIUM SPEC SHEET

BIR-TEL-M

ORDERING CODE

PRODUCT SERIES	TYPE	SIZE	POWER	COLOR TEMPERATURE	PROJECTION	MOUNTING	VOLTAGE	ACCESSORIES
BIR	TEL - TELESCOPIC	M - MEDIUM	10W - 10WATTS	CT22 - 2200K CT27 - 2700K CT30 - 3000K CT40 - 4000K	NB - NARROW MB - MEDIUM WB - WIDE	CM - CEILING MOUNT	AC - 100~264VAC	N - NONE H - HONEYCOMB

FIXTURE FINISHING	
BODY FINISH	TRIM FINISH
BWH - WHITE	TWH - WHITE
BBL - BLACK	TBL - BLACK
BSL - SILVER	TSL - SILVER
BCM - CUSTOM	TGD - GOLD
	TCM - CUSTOM


Sample: BIR-TEL-M-10W-CT22-NB-CM-AC-N-BWH-TGD

DIMENSIONS




PHOTOMETRIC DATA


Polar Curve



BIN Details (CIE 1931)

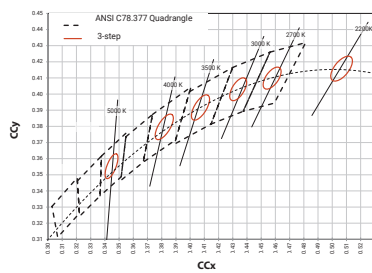


Spectral Distribution

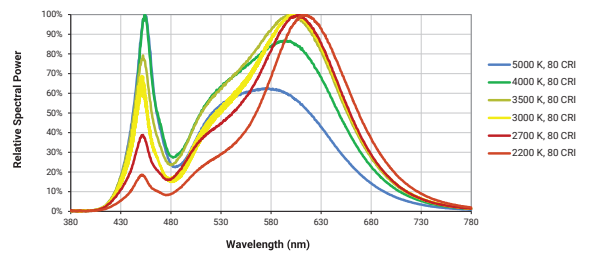

RELATED PRODUCTS

Wall Mount (Single)



Downlight

Uplight

Wall Mount (Double)



Pendant Mount

